



# PRODUCT CATALOGUE 2026/2027

Edition: 2026.1



# TABLE OF CONTENTS

## SERVICES

|                 |   |
|-----------------|---|
| DISTRIBUTOR     | 3 |
| HILTI'S MISSION | 4 |
| TOOL WARRANTY   | 5 |
| SERVICES        | 6 |

## APPLICATIONS AND PRODUCTS

|                                       |    |
|---------------------------------------|----|
| BUILDING CONSTRUCTION / STEEL & METAL | 7  |
| POST-INSTALLED REBAR                  | 9  |
| POST-INSTALLED ANCHORING              | 10 |
| NURON TOOL PARK                       | 11 |
| DEMOLITION AND CORING                 | 12 |
| FORMWORK                              | 16 |
| MECHANICAL & ELECTRICAL               | 17 |
| FASTENING MECHANICAL SUPPORTS         | 19 |
| FASTENING ELECTRICAL CONDUITS         | 20 |
| TOOLS AND INSERTS                     | 21 |



# FOREWORD

## Building Construction

When precision, power, and reliability matter most, our tools and fasteners deliver.

Engineered for professionals who don't compromise, our latest range of power tools and fastening systems is designed to tackle the most demanding job sites with ease.

From high-torque drills to advanced anchoring solutions, every product is built to boost productivity, reduce downtime, and keep you moving.

It's time to gear up with tools that work as hard as you do.



In Nigeria the authorized distributor is ANKER SUPPORT SERVICES LTD and you will be conducting business activity with them and not Hilti directly.

# CONTACT ANKER SUPPORT SERVICES LTD

## Working Hours

Monday to Thursdays: 8am to 5pm  
Friday : 8am to 5pm



**+234-9062457048**

**showroom@ankersup  
port.services**

## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

## ABOUT ANKER SUPPORT SERVICES LTD

We have been in business for 9 years and a Hilti authorized distributor for 9 years.

We have a team of 20 employees that are passionate to provide great customer experiences for our construction professions.

## CALL +234-9062457048 FOR HELP WITH :



Quotations or invoices



Any queries on your order or tool  
repair service



Any question, anytime. Get a  
reliable answer. Just Ask!



Provide product information

## GIVE US A CALL TODAY

## CONTACT INFORMATION

**OFFICE**  
54a ADEOLA  
ODEKU, VICTORIA  
ISLAND, LAGOS.

**CUSTOMER SERVICE**  
**PHONE +234-9062457048**  
  
**CUSTOMER SERVICE EMAIL**  
Showroom@ankersupport.services  
  
**WEBSITE**  
www.hilti.com.ng

## FOLLOW US

**FACEBOOK**  
@hiltiNigeria

**LINKEDIN**  
@Hilti Nigeria



# MAKING CONSTRUCTION BETTER

Hilti's Mission



+234-9062457048

showroom@ankersup  
port.services

## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

## PRODUCTIVITY

Hilti solutions are designed to improve workflows, eliminate or reduce unplanned costs and inefficient processes.

Discover how you can overcome productivity challenges with tools, software and service solutions designed to help you power through your construction projects at every stage — from design through construction to operation.



## SAFETY

At Hilti, we fully understand the impact of accidents, injuries and long-term illnesses on both individuals and companies.

That is why we always go beyond simply complying with codes and regulations and put safety first when we develop our tools, software and services.

All our solutions are designed to help construction industry teams work more safely and comfortably and assist your company in creating and implementing tooling and service solutions that are safer, resilient and sustainable.



## SUSTAINABILITY

We share a common goal: to act more sustainable. We want to create a world less burdened by the construction industry's impact — one that's safer and healthier for all and that benefits from positive contributions to society.

By aligning on business strategies that value the health of our environment, our people and our society as well as economic factors.

We want to be our customers' best partner for productivity, safety and sustainability and deliver better applications, better projects, better processes, and better experiences.





## TOOL SERVICES

Hilti Authorized Distributor



+234-9062457048



showroom@ankersup  
port.services

### SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

## 2 YEARS NO REPAIR COSTS FROM DATE OF PURCHASE



## AFFORDABLE REPAIRS

Hilti distributors' tool service is predictable, allowing you to control your tool repair costs.

## QUALITY REPAIRS

- State of the art repair facilities
- Guaranteed original Hilti spare parts
- Fully trained and certified repair technicians to repair tools with the highest quality in the market

## SPEEDY REPAIRS

- Highly trained technicians will strip, analyze, repair, clean and test your tool
- No registration or proof of purchase required
- Get your tool back to you so you can work is our highest priority

### Materials and workmanship Warranty

Hilti will repair or replace parts that break as a result of defects in materials or workmanships for up to 20 YEARS.

### Wear and Tear Warranty

Hilti distributor will repair tools at no cost for 2 YEARS from the date of purchase.

### Warranty on Charged Repairs

If you pay for your repair Hilti distributor will guarantee the workmanship for 1 MONTH.

Tools exempt from 2 years no cost repair include grinders, UD 4 drill, TE 1 drills, measuring tools.

Batteries and charges for cordless tools are included in the 2 years no cost period.





# ACCOUNT MANAGERS AND FIELD ENGINEERS

Hassle-free services at your fingertips.

## ACCOUNT MANAGERS MAKING JOBSITE TASKS EASIER!

Our dedicated account managers work closely with your project teams to assess requirements and recommend the most effective construction solutions, ensuring alignment with your timelines, budget and technical specifications.

Our account managers can support with :



One point of contact for all your needs



Support with the order management process of Hilti products



Support on-site to understand your challenges and recommend solutions



Provide on-site demonstrations and trainings



## FIELD ENGINEERS MAKING DESIGNS EASIER!

The Hilti distributors' engineers challenge themselves daily to find innovative solutions in safety and productivity.

How they can help you?

- Help your engineers solve design problems
- Show new innovative Hilti fastening solutions
- Provide up-to-date, new safer anchor installation methods
- Help you locate any technical data information
- Support on Hilti design software

Our distributors have access to an engineering competency center and can support you with engineering back-office support.



+234-9062457048



showroom@ankersup  
port.services

### SERVICES

Distributor

Hilti's Mission


Tool Services

Account Managers  
and Field Engineers

# APPLICATION EXPERTS

## Building Construction / Steel & Metal

Our unique range of products, services, and software always come with personal, expert support. From design to demolition, our primary goal is to provide the right solution to help you perform your job on time, on budget and safely.

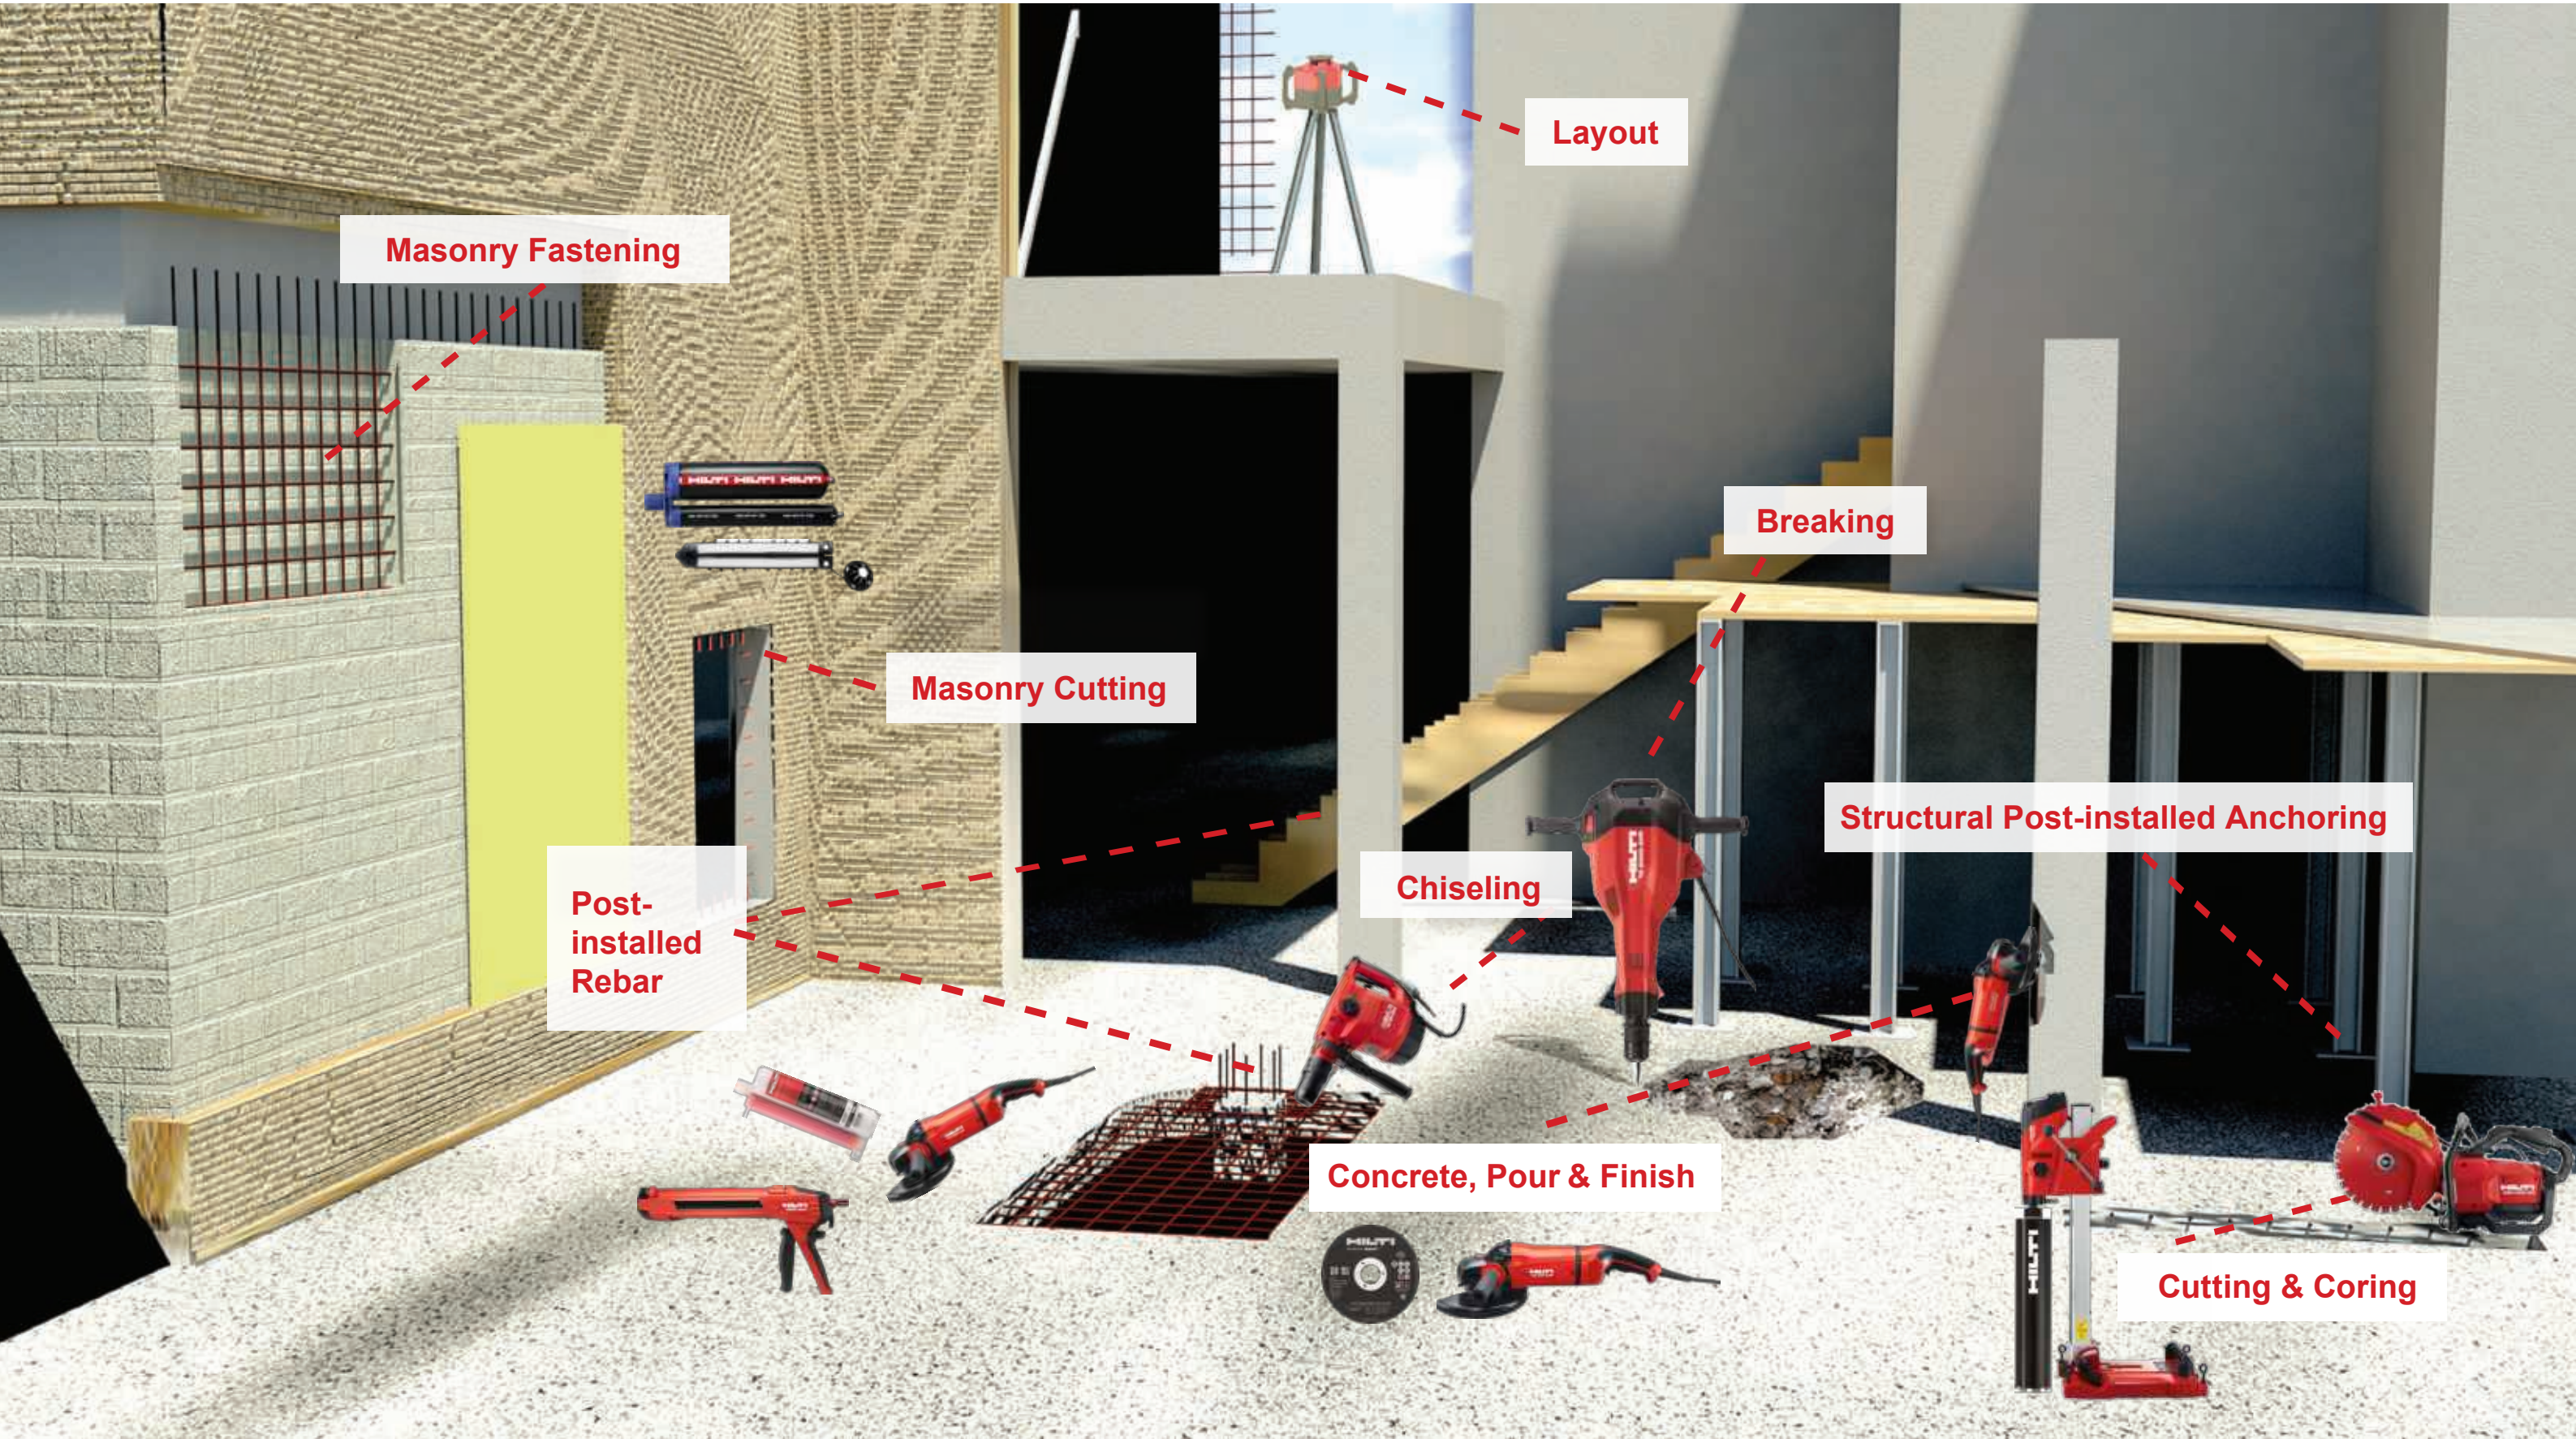

# APPLICATION EXPERTS

## Building Construction / Steel & Metal

Our unique range of products, services, and software always come with personal, expert support. From design to demolition, our primary goal is to provide the right solution to help you perform your job on time, on budget and safely.

Power Tools

Post-Installed Rebar



Post-installed Anchoring



Formwork



Demolition




Diamond Coring



Tool Inserts



Fasteners and Consumables

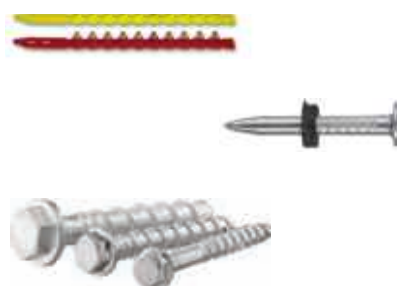

Accessories



# POST-INSTALLED REBAR / Concrete & Foundations

Enhance job-site productivity with Hilti fastening solutions.



## STRONGER

Reduced bubbles and exact dosing create a stronger, longer-lasting hold.

## FASTER

Injectable mortars outperform traditional epoxy grouts.

## SAFER

Safer option than traditional epoxy grouts.

## CHEMICAL ANCHORS



HIT-RE 10

Standard



HIT-RE 100-HC

Approved



HIT-HY 200-R V3

Specified



HIT-RE 500 V4

Specified

|                 |
|-----------------|
| Name            |
| Curing          |
| Site Conditions |
| Load-bearing    |
| Doweling        |
| Approvals       |

Slow

Dry

Light

Yes

No

Slow

Wet or Dry

Medium

Yes

ETA, Fire

Fast

Wet or Dry

Heavy

Yes

ETA, ICC-ES report (concrete), Seismic

Slow

Wet or Dry

Heavy

Yes

ETA, Fire, Seismic

WATCH THESE VIDEOS.



## SDS PLUS: TE 6-22 AND TE 30-AVR, SDS MAX: TE 50-AVR

- Best in their weight class with up to 40% faster drilling than the competition.
- Unmatched operator safety and comfort with advanced Active Vibration Reduction (AVR) technology.
- 2 Year no repair cost from date of purchase



## HAMMER DRILL BITS: TE-CX AND TE-YX

The ultimate hammer drill bit with 4 carbide cutting edges for drilling holes into concrete with rebar.

## NURON CORDLESS DISPENSER HDE

- Reduce fatigue and ensure exact dispensing of the chemical volume.
- Increased application reliability and saves cost on wastage.



## MANUAL DISPENSER HDM



## CLEANING HOLES

A wide range of accessories available.



## CARTRIDGES

Use with HIT-RE 500 V4



Use with HIT-HY 200-R V3



## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers and Field Engineers

## BUILDING CONSTRUCTION / STEEL & METAL

Post-installed Rebar

Post-installed Anchoring

Nuron Tool park

Demolition Jackhammers

Demolition Combi-hammers

Diamond Coring

Formwork

# POST-INSTALLED ANCHORING

Structural Anchoring



## CHEMICAL ANCHORS



## MECHANICAL ANCHORS



Name

HIT-RE 100-HC

HIT-HY 200-A V3

HIT-RE 500 V4

Name

Wedge Anchor HST2 V3

Wedge Anchor HST4

Curing

Slow

Fast

Slow

Approved

For static and seismic loads in cracked concrete.

Specified

High static and seismic loads in cracked concrete.

Load-bearing

Medium

Heavy

Heavy

Carbon steel, Hot-dipped Galvanized, Stainless Steel

Carbon steel, Hot-dipped Galvanized, Stainless Steel

Anchor rods

HAS Rod Galvanized or Hot Dipped Galvanized

HAS Rod Galvanized or Hot Dipped Galvanized

HAS Rod Galvanized or Hot Dipped Galvanized

Medium

Heavy

Approvals

ETA, Fire

ETA, ICC-ES report (concrete), Fire, Seismic

ETA, Fire, Seismic

ETA, Fire, Seismic

ETA, Fire, Seismic

## DISPENSERS

Option of a battery-powered or manual dispenser.



## CARTRIDGES



Use with HIT-HY 200-R V3



Use with HIT-RE 500 V4

## CLEANING HOLES

A wide range of accessories available.



## HST4 WITH SI-AT-22 MODULE WATCH THIS VIDEO



## DRILLING HOLES FOR ANCHORS

Nuron Cordless Rotary Hammers TE 6-22 TE 30-22 SDS Plus, Corded TE 30-AVR SDS Plus



## DRILL BITS: TE-YX , TE-CX

A wide range of TE-CX and TE-YX concrete drill bits available.

## TIGHTENING ANCHORS



Nuron cordless impact wrenches: SIW 6AT-22 1/2 inch use with the Hilti SI-AT-22 Torque Module for HST4 wedge anchors.

## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers and Field Engineers

## BUILDING CONSTRUCTION / STEEL & METAL

Post-installed Rebar

Structural Anchoring

Nuron Tool park

Demolition Jackhammers

Demolition Combi-hammers

Diamond Coring

Formwork

# POST-INSTALLED ANCHORING / Non-Structural Anchoring



## CHEMICAL ANCHORS



## MECHANICAL ANCHORS



|                |                                                    |                                                     |                                                                                      |                                                      |
|----------------|----------------------------------------------------|-----------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------|
| Name           | HIT-RE 10                                          | HIT-MM Plus                                         | HIT-HY 170                                                                           | HVU2 Capsule                                         |
|                | Standard                                           | Approved                                            | Approved                                                                             | Specified                                            |
| Curing         | Slow                                               | Fast                                                | Fast                                                                                 | Fast                                                 |
| Base materials | Anchoring non-structural secondary steel elements. | Anchoring in <b>uncracked concrete and masonry.</b> | Anchoring in concrete ( <b>cracked, uncracked</b> ), <b>Masonry (hollow, solid).</b> | Anchoring in concrete ( <b>cracked, uncracked</b> ). |
| Load-bearing   | Light-Medium                                       | Light-Medium                                        | Medium                                                                               | Medium- Heavy                                        |
| Approvals      | -                                                  | ETA                                                 | ETA, Seismic                                                                         | ETA, Seismic, Fire                                   |

|                     |                                                      |                                                          |                                               |                                                                            |
|---------------------|------------------------------------------------------|----------------------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------|
| Name                | Wedge Anchor HSA                                     | Wedge Anchor HST2 V3                                     | Screw Anchor HUS 4-C                          | Screw Anchor HUS 4-H                                                       |
|                     | For everyday static in <b>uncracked concrete.</b>    | For static and seismic loads in <b>cracked concrete.</b> | For fastening to <b>concrete and masonry.</b> | For fastening to <b>concrete (cracked, uncracked, hollow) and masonry.</b> |
| Material, corrosion | Carbon steel, Hot-dipped Galvanized, Stainless Steel | Carbon steel, Hot-dipped Galvanized, Stainless Steel     | Carbon steel, Hot-dipped Galvanized           | Carbon steel, Hot-dipped Galvanized                                        |
| Head configuration  | Externally threaded                                  | Externally threaded                                      | Countersunk                                   | Hexagonal                                                                  |
| Features            | 3 embedment depths offering maximum flexibility.     | Optimize anchor length and embedment.                    | Removable, adjustable and reusable.           | Removable, adjustable and reusable.                                        |
| Approvals           | ETA                                                  | ETA, Seismic, Fire                                       | ETA, Seismic, Fire                            | ETA, Seismic, Fire                                                         |

## MANUAL DISPENSER HDM & CARTRIDGES



## DRILLING HOLES FOR ANCHORS

Nuron Cordless TE6-22 or TE 30-22 SDS Plus Corded TE 30-AVR SDS Plus.

## ANCHOR RODS & SLEEVES



## DRILL BITS

A wide range of TE-C concrete drill bits. For reinforced concrete try our TE-CX drill bit.



## TIGHTENING ANCHORS

Nuron cordless impact wrenches available SIW 4AT-22 (compact-class), SIW 6AT-22 (power-class), SIW 8-22 (ultimate-class).



## WALL SCANNER

PS 85 wall scanner for locating embedded objects for hit prevention when drilling, coring, cutting or slitting.

## SOCKETS



## HIT-HY 170 VIDEO



## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers and Field Engineers

## BUILDING CONSTRUCTION / STEEL & METAL

Post-installed Rebar

Non-structural Anchoring

Nuron Tool park

Demolition Jackhammers

Demolition Combi-hammers

Diamond Coring

Formwork

# NURON TOOL PARK

One Cordless  
Platform



POWER-PACKED  
PERFORMANCE



DURABILITY  
AND SAFETY



LONGER  
RUN-TIMES



Wear and Tear Warranty

Hilti distributor will repair tools at  
no cost for 2 YEARS from the  
date of purchase.



Two additional spring-  
loaded plugs deliver  
**twice the power** to your  
light to heaviest-duty jobs.



Shock absorbing bumpers  
have been added to the  
outside of the battery for  
**increased drop  
protection.**



New potted casing  
**protect electronics**  
from moisture, dust and  
other contaminants.



Redesigned battery cell  
holders provide  
improved heat  
management to **enable  
greater performance.**



Floor  
Jackhammers



Rotary / Combi  
hammers



Drill drivers



Angle  
grinders



Circular  
saws



Wall  
Jackhammers



Cut off saws



Combi  
hammers



Battery nailers



Dispensers



Impact  
drivers



Impact  
wrenches



Torque  
modules



Vacuums

WATCH ME



## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

## BUILDING CONSTRUCTION / STEEL & METAL

Post-installed Rebar

Post-installed  
Anchoring

Nuron Tool park

Demolition  
Jackhammers

Demolition  
Combi-hammers

Diamond Coring

Formwork

DEMOLITION

Jack  
Hammers

Trusted by Pros. Powered by Hilti.



JACK  
HAMMERS



TE 800-AVR



TE 1000-AVR



TE 2000-AVR



TE 3000-AVR

In-line design for floor breaking and ergonomic side handle for occasional wall breaking.

Maintenance-free brushless SR motor and triple-chamber lubrication systems for longer service intervals and tool lifetime.

Wall and Floor

TE-S

10.6 kg

21 J

2,500 cm³/min

1,890 impacts/minute

2 Years No Repair Costs

Versatile breaker for demolishing or chiseling floors and occasional wall applications (with universal power cord).

Maintenance-free brushless SR motor and triple-chamber lubrication systems for longer service intervals and tool lifetime.

Lower Wall and Floor

TE-S

12.5 kg

26 J

7,800 cm³/min

1,950 impacts/minute

2 Years No Repair Costs

Very low tool weight combined with high demolition performance for dedicated floor breaking. T-design for perfect handling in floor-breaking applications.

Detachable supply cord for quick and easy replacement of damaged/broken cords on the job site.

Medium-duty floor

TE-S

14.5 kg

35 J

14,200 cm³/min

1,800 impacts/minute

2 Years No Repair Costs

Exceptionally powerful breaker for heavy-duty concrete demolition, asphalt cutting, earthwork and driving ground rods.

Virtually maintenance-free brushless motor and triple-chamber lubrication systems for less downtime and longer lifetime.

Heavy-Duty Floor

TE-H (Hilti HEX 28)

27.1 kg

85 J

60,000 cm³/min

858 impacts/minute

2 Years No Repair Costs

CHISELS

- Increase productivity with self-sharpening pointed chisels and wave design technology for faster dust removal, with less sticking.
- Connection ends C, Y, S, H
- Pointed or Flat



ACTIVE VIBRATION REDUCTION

- Active Vibration Reduction (AVR) makes the tool less tiring to use – helping to increase daily productivity.
- Reduces vibration by up to two-thirds compared with conventional power tools



TE 2000-AVR



AVR



TE 800-AVR



CHISELS



SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

BUILDING CONSTRUCTION /  
STEEL & METAL

Post-installed Rebar

Post-installed  
Anchoring

Nuron Tool park

Demolition  
Jackhammers

Demolition  
Combi-hammers

Diamond Coring

Formwork

DEMOLITION

Combi-Hammers

Trusted by Pros. Powered by Hilti.



SCALING CHISEL TE-YX SC  
Connection end: TE-Y  
Length: 280mm  
Diameter: 8mm



POINTED CHISEL TE-YX SM  
Connection end: TE-Y  
Lengths: 500mm and 360 mm



FLAT CHISEL TE-YX FM  
Connection end: TE-Y  
Lengths: 500mm and 360 mm



POINTED CHISEL TE-CX SM  
Connection end: TE-C  
Lengths: 180mm and 250mm



FLAT CHISEL TE-CX FM  
Connection end: TE-C  
Lengths: 180mm and 250mm

TE 50-AVR VIDEO



COMBI HAMMERS

|                                |
|--------------------------------|
| Name                           |
| Working Direction:             |
| Tool Chuck Type:               |
| Weight:                        |
| Impact Energy:                 |
| Optimal Hammer Drilling Range: |
| Full Hammering Frequency:      |
| Tool Repair:                   |

|                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------|
| TE 30-AVR                                                                                                                                |
| Chiseling in brick and block, corrective chiseling and surface finishing on concrete.                                                    |
| Drilling anchor, rebar and through holes in concrete and masonry – possible diameter range 4-28 mm, recommended diameter range 10-20 mm. |
| Wall                                                                                                                                     |
| TE-C                                                                                                                                     |
| 4.2 kg                                                                                                                                   |
| 3.6 J                                                                                                                                    |
| 10 - 20 mm                                                                                                                               |
| 4,500 impacts/minute                                                                                                                     |
| 2 Years No Repair Costs                                                                                                                  |

|                                                                                        |
|----------------------------------------------------------------------------------------|
| TE 30-22                                                                               |
| Light-duty chiseling – such as tile scraping, channel cleaning and surface correction. |
| Drilling anchor holes in concrete and masonry (recommended diameter range 10-25 mm).   |
| Drilling holes for reinforcing bar doweling.                                           |
| Wall                                                                                   |
| TE-C                                                                                   |
| 3.9 kg                                                                                 |
| 3.8 J                                                                                  |
| 10 - 25 mm                                                                             |
| 4,500 impacts/minute                                                                   |
| 2 Years No Repair Costs                                                                |

|                                                                 |
|-----------------------------------------------------------------|
| TE 50-AVR                                                       |
| Exceptionally light and versatile SDS Max (TE-Y) rotary hammer. |
| Low contact pressure for high user comfort.                     |
| Wall, Medium-duty floor                                         |
| TE-Y                                                            |
| 6.1 kg                                                          |
| 6 J                                                             |
| 16 - 35 mm                                                      |
| 3,510 impacts/minute                                            |
| 2 Years No Repair Costs                                         |

|                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------|
| TE 60-22                                                                                                                            |
| Maximized working time per charge – brushless motor and more efficient Nuron batteries help you get up to 3x more battery run time. |
| includes Active Torque Control (ATC) , Active Vibration Reduction (AVR).                                                            |
| Wall, Medium-duty floor                                                                                                             |
| TE-Y                                                                                                                                |
| 6.4 kg                                                                                                                              |
| 8.8 J                                                                                                                               |
| 18 - 40 mm                                                                                                                          |
| 3,480 impacts/minute                                                                                                                |
| 2 Years No Repair Costs                                                                                                             |

|                                                                               |
|-------------------------------------------------------------------------------|
| TE 70-AVR                                                                     |
| Highest productivity for a wide range of drilling and chiseling applications. |
| Low contact pressure for high user comfort.                                   |
| Wall, Medium-duty floor                                                       |
| TE-Y                                                                          |
| 8.3 kg                                                                        |
| 11.5 J                                                                        |
| 20 - 45 mm                                                                    |
| 2,760 impacts/minute                                                          |
| 2 Years No Repair Costs                                                       |

SERVICES

- Distributor
- Hilti's Mission
- Tool Services
- Account Managers and Field Engineers

BUILDING CONSTRUCTION / STEEL & METAL

- Post-installed Rebar
- Post-installed Anchoring
- Nuron Tool park
- Demolition Jackhammers

Demolition Combi-hammers

Diamond Coring

Formwork

# DIAMOND CORING

Fast. Clean. Profitable. That's Hilti coring Solutions.



DD 120

Compact and lightweight concrete core drill – for much easier handling

Two-speed gearing for optimum speed and torque

Light-Duty

Range Diameter Coring: 16 to 162 mm

Gears: 2

Chuck Type: BI

Type: Wet

Rig-based drilling system: Yes

Tool Repair: 2 Years No Repair Costs

STAND  
DD-ST 120 SFL



DD 150-U

Versatile diamond coring machine for handheld or rig-based.

High motor performance and sturdy three-speed gearing for optimum drilling speed.

Light-Duty

Range Diameter Coring: 8 to 162 mm

Gears: 3

Chuck Type: BI

Type: Wet or Dry

Rig-based drilling system: Yes and hand-held

Tool Repair: 2 Years No Repair Costs

STAND  
DD-ST 150-U CTL



DD 160

Exceptionally user-friendly thanks to intuitively-designed features and controls

Sturdy three-speed gearing for outstanding concrete coring performance across the entire diameter range

Medium-Duty

Range Diameter Coring: 25 to 202 mm

Gears: 3

Chuck Type: BI - BS

Type: Wet

Rig-based drilling system: Yes

Tool Repair: 2 Years No Repair Costs

STAND  
DD-ST 160 SFL



DD 200

Air-cooled, heavy-duty drive unit with three-speed gearing and convenient controls

Power control LED – shows even inexperienced users how to achieve the optimum drilling speed and maximise core bit life

Heavy-Duty

Range Diameter Coring: 35 to 500mm

Gears: 3

Chuck Type: BI-BS

Type: Wet

Rig-based drilling system: Yes

Tool Repair: 2 Years No Repair Costs

STAND  
DD-HD 30



STANDARD

CORE BIT P-U

Diameter Range: 35mm to 300mm  
Length: 430mm  
Applications:  
Rig-based, wet coring in all types of concrete

PREMIUM

CORE BIT SP-H

Diameter Range: 52mm to 500mm  
Length : 450mm  
Applications:  
Rig-based, wet coring in all types of concrete

WATER SUPPLY UNITS



CONNECTION ENDS AND ACCESSORIES



DD 200  
VIDEO



CORE BITS  
VIDEO



SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

BUILDING CONSTRUCTION /  
STEEL & METAL

Post-installed Rebar

Post-installed  
Anchoring

Nuron Tool park

Demolition  
Jackhammers

Demolition  
Combi-hammers

Diamond Coring

Formwork

# FORMWORK /



## POWDER-ACTUATED FASTENING TOOL DX 2

Switch from a hammer to a direct fastening tool



Semi-automatic powder-actuated tool for fastening single nails in medium-duty applications.



|                       |                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Weight                | 2.4 Kg                                                                                                                           |
| Fastener intake       | Single                                                                                                                           |
| Fastener length range | 14 - 62 mm                                                                                                                       |
| Features              | <ul style="list-style-type: none"><li>One tool for a wide range of applications</li><li>Allows access to narrow spaces</li></ul> |
| Nails                 |  X-C P8 or X-U P8                            |
| Cartridge type        |  .27 calibre short 6.8/11 M10                |

## CORDLESS ROTARY HAMMER SDS PLUS TE 6-22

Versatile SDS Plus cordless rotary hammer with wide drilling range, chipping function and quick-change chuck (Nuron battery platform)

|                               |                                                                                                                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                        | 2.84 kG                                                                                                                                                                          |
| Optimal hammer drilling range | 6 - 18 mm                                                                                                                                                                        |
| Full hammering frequency      | 5100 impacts/minute                                                                                                                                                              |
| Features                      | <div>Chiseling<br/>Chipping<br/>Depth gauge<br/>Removable chuck</div> <div>Reverse mode<br/>Torque clutch<br/>Active Torque Control ATC<br/>Active Vibration Reduction AVR</div> |



## REUSABLE SCREW ANCHOR HUS4-H

High-performing hexagonal head screw anchor

Significantly lowers your cost to improve profitability and productivity.



## CORDED & NURON GRINDERS

A wide range of grinders and discs to suit every need.



## VACUUMS



## CIRCULAR SAWS

Nuron cordless Circular saw SC 4WL-22 and blades.



## CORDLESS IMPACT WRECH SIW 6AT-22

Power-class 22V impact wrench with robust 1/2 inch friction ring anvil for faster and safer anchoring and bolting.



|                       |                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------|
| Anvil type            | 1/2" friction ring                                                                    |
| Max. torque           | 300 Nm; 450 Nm                                                                        |
| Nut-busting torque    | 650 Nm                                                                                |
| Gears                 | gear 1: 1550 rpm;<br>gear 2: 1750 rpm                                                 |
| Wide range of sockets |  |

### SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

### BUILDING CONSTRUCTION / STEEL & METAL

Post-installed Rebar

Post-installed  
Anchoring

Nuron Tool park

Demolition  
Jackhammers

Demolition  
Combi-hammers


Diamond Coring

Formwork

# APPLICATION EXPERTS

## Mechanical & Electrical

Our unique range of products, services, and software always come with personal, expert support. From design to demolition, our primary goal is to provide the right solution to help you perform your job on time, on budget and safely.

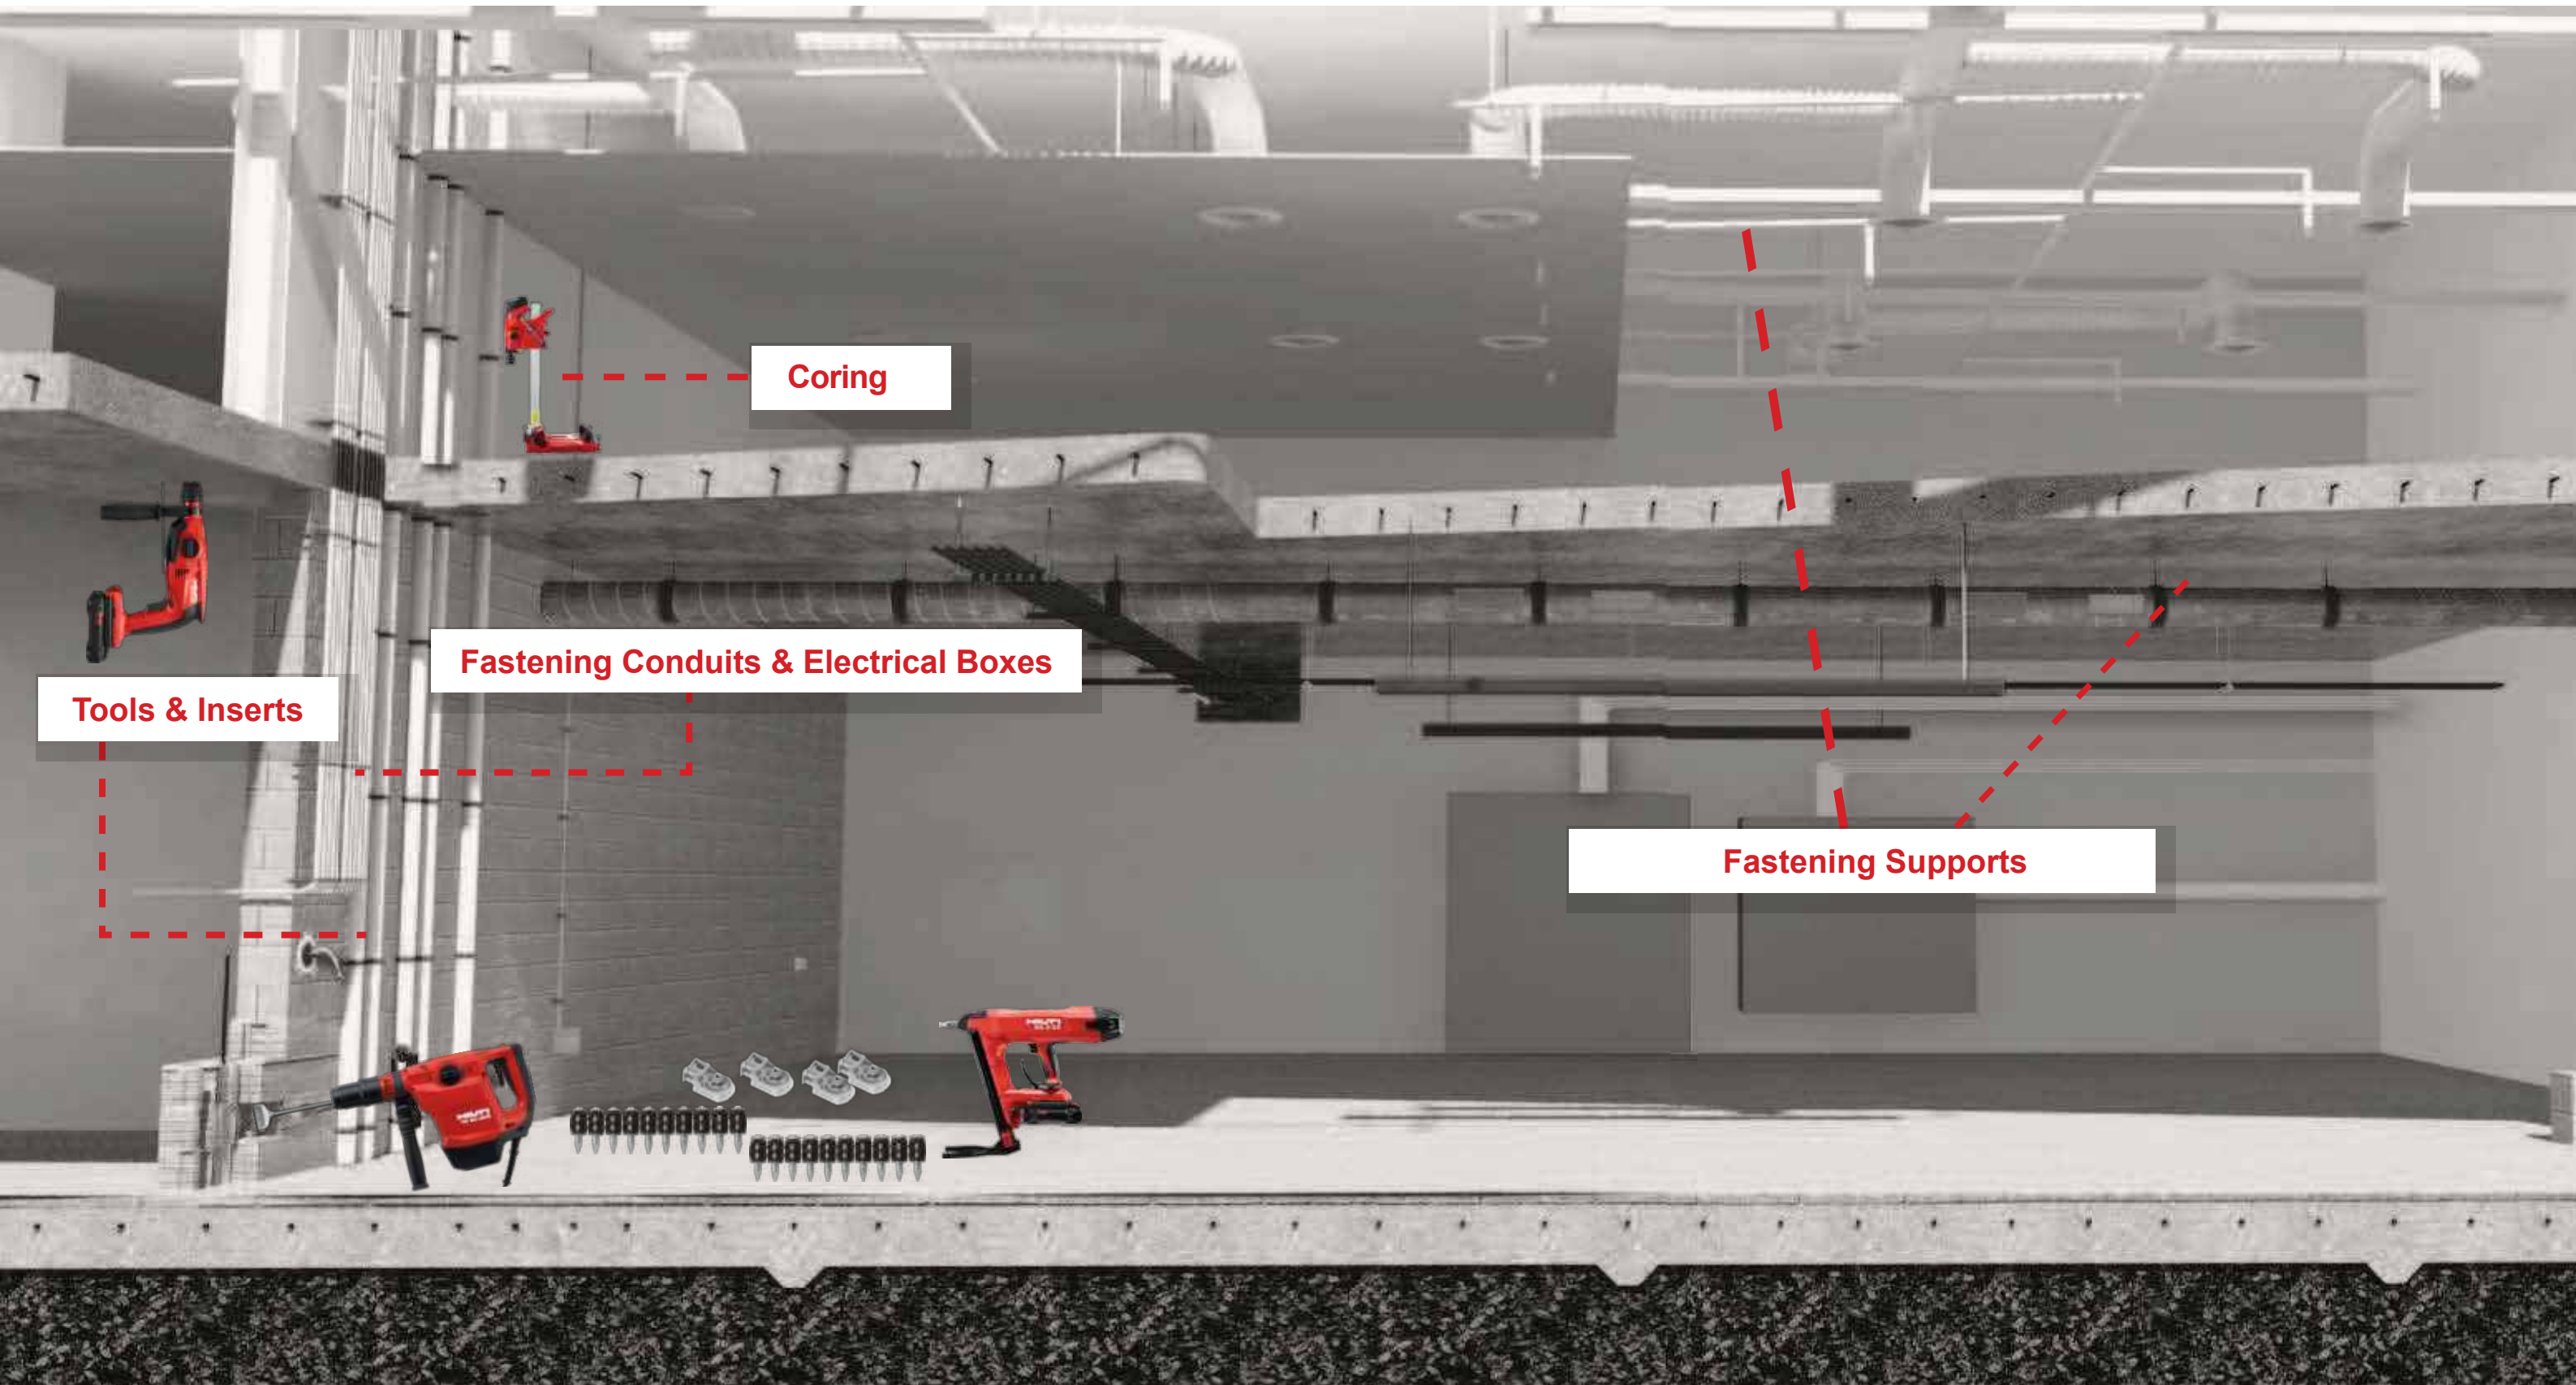

# APPLICATION EXPERTS

## Mechanical & Electrical

Our unique range of products, services, and software always come with personal, expert support. From design to demolition, our primary goal is to provide the right solution to help you perform your job on time, on budget and safely.

### Fastening Mechanical Supports

### Fastening Electrical Conduits

### Diamond Coring

#### Power Tools



#### Tool Inserts



#### Fasteners and Consumables



#### Accessories



# FASTENING MECHANICAL SUPPORTS

/ Mechanical  
Trade



## HKD DROP-IN ANCHOR



“Intelligent” stepped  
expansion cone allows  
easy, correct setting even  
in harder materials.

## HKV DROP-IN ANCHOR (NO LIP)



Carbon steel,  
zinc-plated



## SET AND DRILL WITH SAME TOOL

Installing drop-in anchors can be time consuming, but not when you have the Hilti **HKD-TE-CX setting tool**, you can drill and then set the anchor with one tool.

This saves more time per fixing than the traditional method of knowing the anchor in with a hammer.

Setting tool for HKD anchors with an integrated SDS Plus (TE-C) stop hammer drill bit.

## DRILLING OVERHEAD

Battery-powered Nuron tools work best for overhead drilling, no hassle with cords and they are light weight.

Using a **Dust Removal System** like the **DRS 4/6** is an on board vacuum with the Nuron SDS Plus Rotary Hammers TE 4-22 or TE 6-22 collect the dust before it falls on the worker.



## RECOMMENDED OVERHEAD DRILLING HOLES UP TO 18MM

Nuron battery-powered SDS Plus Rotary Hammers



### TE 2-22 SDS PLUS ROTARY HAMMER

**Drilling Range:** 4 - 12 mm

**Chuck Type:** TE-C

**Applications:** Compact cordless tool for overhead drilling, finishing, fastening, and small tasks.



### TE 4-22 SDS PLUS ROTARY HAMMER

**Drilling Range:** 4 - 14 mm

**Chuck Type:** TE-C

**Applications:** Concrete and masonry drilling with OSHA dust control.

## NURON CHARGERS

Fast Charger  
or Standard Charger



## NURON BATTERIES

Options: B 22-55 (2,6 Ah),  
B 22-85 (4 Ah), B 22-110  
(5.2 Ah)



### TE-CX (SDS Plus) DRILL BIT

**Diameter Range:** 5.5 mm - 28 mm

**Length Range:** 120 mm-900 mm

**No. of Cutting Edges:** 4

**Applications:** Anchor & rebar drilling.

## HKD



## TE 2-22



### TE-C (SDS Plus) DRILL BIT

**Diameter Range:** 4 mm - 16 mm

**Length Range:** 110 mm-310 mm

**No. of Cutting Edges:** 2

**Applications:** Anchor & concrete  
drilling.

## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

## MECHANICAL & ELECTRICAL

Fastening Mechanical  
Supports

Fastening Electrical  
Conduits

Tools and Inserts

# FASTENING ELECTRICAL CONDUITS

/ Electrical Trade



## FASTENING CONDUITS JUST GOT EASIER BX 4-22 Nuron battery-operated fastening tool



## TECHNICAL DATA

|                       |                                                                                                          |
|-----------------------|----------------------------------------------------------------------------------------------------------|
| Fastener intake       | Nails on strip                                                                                           |
| Fastener Length Range | 14 to 48mm                                                                                               |
| Features              | Drive up to 1000 nails per hour<br>Nail refill indicator<br>More reliable fastening<br>Better stick rate |
| Nails                 | X-P B4, X-C B4, X-S B4                                                                                   |
| Battery & Chargers    | Nuron                                                                                                    |

### Cable tie holder X-ECT MX



Plastic cable/conduit tie holder for use with collated nails.

### Cable clasp X-EKB MX



Plastic cable clasp for use with collated nails.

### Butterfly Conduit clip X-DFB MX



Butterfly conduit clip.

### Conduit clip X-FB MX



Metal cable/conduit clip for use with collated nails.

### Textile Tape TT Black



Textile tape for fastening cables and conduits on floors 10 metres.

### COLLATED NAILS



### High Performance X-P B4



Lengths available:  
17, 20, 24mm

### Concrete X-C B4



Lengths available:  
20, 27, 32, 39, 45mm

### Steel X-S B4



Lengths available:  
14mm

### BX 4-22 VIDEO



### NURON CHARGERS

Fast Charger  
or Standard Charger



### NURON BATTERIES

Options: B 22-55 (2,6 Ah),  
B 22-85 (4 Ah), B 22-110  
(5.2 Ah)



### NURON GRINDER TO CUT CONDUIT PIPES AG 4S-22



### TOOL BAG



## SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

## MECHANICAL & ELECTRICAL

Fastening Mechanical  
Supports

Fastening Electrical  
Conduits

Tools and Inserts

# TOOL INSERTS

All Trades



**POINTED CHISEL TE-YX SM**  
Connection end: TE-Y  
Lengths: 500mm and 360 mm



**POINTED CHISEL TE-SX SM**  
Connection end: TE-S  
Lengths: 500mm and 360 mm



**POINTED CHISEL TE-HX SM**  
Connection end: TE-H  
Lengths: 500mm and 400 mm



**FLAT CHISEL TE-YX FM**  
Connection end: TE-Y  
Lengths: 500mm and 360 mm




**FLAT CHISEL TE-SX FM**  
Connection end: TE-S  
Lengths: 500mm and 360 mm



**FLAT CHISEL TE-HX FM**  
Connection end: TE-H  
Lengths: 500mm and 400mm



**TE-CX (SDS Plus) DRILL BIT**  
Diameter Range: 5.5 mm - 28 mm  
Length Range: 120 mm-900 mm  
No. of Cutting Edges: 4  
Applications: Anchor & rebar drilling.



**TE-C (SDS Plus) DRILL BIT**  
Diameter Range: 4 mm - 16 mm  
Length Range: 110 mm-310 mm  
No. of Cutting Edges: 2  
Applications: Anchor & concrete drilling.



**TE-YX (SDS Max) DRILL BIT**  
Diameter Range: 12 mm - 35 mm  
Length Range: 320 mm-720 mm  
No. of Cutting Edges: 4-6  
Applications: Anchor & rebar drilling.




**TE-Y (SDS Max) DRILL BIT**  
Diameter Range: 12 mm - 40 mm  
Length Range: 320 mm-540 mm  
No. of Cutting Edges: 2  
Applications: Anchor & rebar installation.




**ADAPTER TE-Y-AD**  
Diameter Range: 30mm Length Range: 290mm  
Applications: Deep and overhead hammer drilling.




**HSS G DRILL BIT**  
Diameter Range: 2 mm - 18 mm  
Length Range: 24 mm-178 mm  
Applications: Metal & plastic drilling. "Everyday Bit"

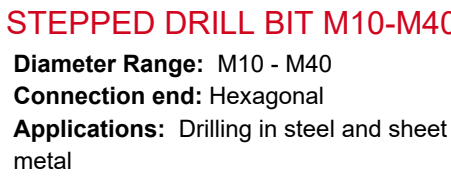

**STEPPED DRILL BIT M10-M40**  
Diameter Range: M10 - M40  
Connection end: Hexagonal  
Applications: Drilling in steel and sheet metal

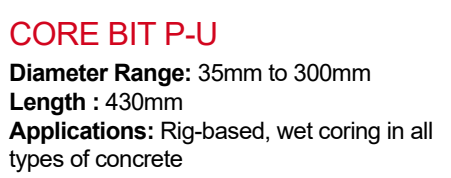

**CORE BIT SP-H**  
Diameter Range: 52mm to 500mm  
Length : 450mm  
Applications: Rig-based, wet coring in all types of concrete

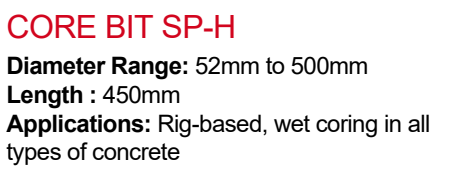

**CORE BIT P-U**  
Diameter Range: 35mm to 300mm  
Length : 430mm  
Applications: Rig-based, wet coring in all types of concrete



## ABRASIVE CUTTING AND GRINDING DISCS

Hilti offers cutting and grinding discs in sizes 4", 5" and 7".  
The OSA approved discs are designed for optimal life and performance when used on carbon steel.



## DIAMOND CUP WHEELS DG-CX

Ideal for the finish of grinding concrete, steel and natural stone.  
Offer long life and unique pin holes for better segment cooling, giving you faster progress.



## DIAMOND CUTTING DISCS P and SP

Dense concentration of high-quality diamonds delivers much faster cutting speed on reinforced concrete.  
Diamond blade for cutting in different base materials; Masonry, Natural stone, Concrete, Concrete (reinforced).



## METAL CUTTING DISCS SPX

30 to 100 times longer-lasting than an abrasive disc – direct productivity increase at the jobsite due to significantly fewer blade exchanges.



## WOOD CUTTING BLADE

For Nuron cordless circular saw SC 4 WL-22.



### SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

### ALL TRADES

Inserts

Concrete Drilling

Fastening, Driving,  
Metal Drilling

Cutting and Grinding

# CONCRETE / All Trades DRILLING



## TE 2-22 SDS PLUS ROTARY HAMMER

**Drilling Range:** 4 - 12 mm  
**Chuck Type:** TE-C  
**Applications:** Compact cordless tool for overhead drilling, finishing, fastening, and small tasks.



## TE 1 SDS PLUS ROTARY HAMMER

**Drilling Range:** 4 - 12 mm  
**Chuck Type:** TE-C  
**Applications:** In concrete, masonry, and stone with reverse for easy bit removal.



## TE 30-AVR SDS PLUS ROTARY HAMMER

**Hammer Drilling Range:** 10-25 mm  
**Chuck Type:** TE-C  
**Applications:** Drilling/chiseling in reinforced concrete, occasional drilling wood /steel.



## TE 4-22 SDS PLUS ROTARY HAMMER

**Drilling Range:** 4 - 14 mm  
**Chuck Type:** TE-C  
**Applications:** Concrete and masonry drilling, OSHA dust control.



## TE 2-M SDS PLUS ROTARY HAMMER

**Drilling Range:** 6 - 16 mm  
**Chuck Type:** TE-C  
**Applications:** Versatile tool for drilling, hammering and chiseling .



## TE 50-AVR SDS MAX ROTARY HAMMER

**Hammer Drilling Range:** 16-35mm  
**Chuck Type:** TE-Y  
**Applications:** Drilling/chiseling in reinforced concrete, natural stone or masonry.



## TE 6-22 SDS PLUS ROTARY HAMMER

**Drilling Range:** 6 - 18 mm  
**Chuck Type:** TE-C  
**Applications:** Drilling, chiseling, and holes for anchors, OSHA dust control.



## TE 3-CL SDS PLUS ROTARY HAMMER

**Drilling Range:** 6 - 16 mm  
**Chuck Type:** TE-C  
**Applications:** Versatile tool for drilling, hammering, chiseling.



## TE 60-22 SDS MAX ROTARY HAMMER

**Hammer Drilling Range:** 18-40 mm  
**Chuck Type:** TE-Y  
**Applications:** Drilling/chiseling in reinforced concrete or masonry.



## TE 30-22 SDS PLUS ROTARY HAMMER

**Hammer Drilling Range:** 10-25 mm  
**Chuck Type:** TE-C  
**Applications:** Drilling/chiseling in reinforced concrete, occasional drilling wood /steel.



## TE 6-CL SDS PLUS ROTARY HAMMER

**Drilling Range:** 6 - 16 mm  
**Chuck Type:** TE-C  
**Applications:** Hammer drilling, Drilling, Chiseling, Chisel setting



## TE 70-AVR SDS MAX ROTARY HAMMER

**Hammer Drilling Range:** 12-150 mm  
**Chuck Type:** TE-Y  
**Applications:** Drilling/chiseling in reinforced concrete, high-torque drilling wood /steel.

### SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

### ALL TRADES

Inserts

Concrete Drilling

Fastening, Driving,  
Metal Drilling

Cutting and Grinding

# FASTENING, DRIVING, METAL DRILLING

/ All Trades



## SID 4-22 IMPACT DRIVER

Compact brushless impact driver optimized for more reliable and efficient non-structural fastening in wood and metal. Ideal impact driver when you need to work in tight spaces

**Features:** LED Light around the chuck

**Max. Torque:** 186 Nm

**Chuck Type:** 1/4" hexagonal click-in



## SIW 4AT-22 IMPACT WRENCH

Compact-class cordless impact wrench with the ultimate balance of power and handling with robust 1/2" friction ring anvil.

**Features:** 3 speed setting, LED light, brushless motor

**Max. Torque:** 213 Nm



## UD 30 UNIVERSAL DRILL

**Chuck Clamping Range:** 2-13mm

**Number of gears** 2

**Chuck Type:** Pistol grip, Quick-release chuck 13 mm

**Applications:** Corded two-speed, high-rpm drill driver for metal applications



## SF 4-22 DRILL DRIVER

Compact-class cordless drill driver with Active Torque Control for everyday drilling and driving, especially in hard-to-reach places

**Features:** ATC, LED Light work light, full metal chuck, brushless motor, optimized cooling for tough job-site conditions.

**Max. Torque:** 36 Nm (soft joint), 62 Nm (hard joint)

**Chuck Clamping Range:** 2 - 13mm



## SIW 6AT-22 IMPACT WRENCH

Powerful impact wrench with robust 1/2" friction ring anvil for faster and safer anchoring and bolting

**Features:** 2 speed setting, LED light, brushless motor

**Max Torque:** 450 Nm



## UD 4 UNIVERSAL DRILL

**Chuck Clamping Range:** 1-10mm

**Number of gears:** 1: 3200 rpm

**Chuck Type:** Keyed chuck

**Applications:** Lightweight, compact corded drill driver for applications in metal and wood



## SF 6H-22 HAMMER DRILL DRIVER

High-speed, high-torque cordless hammer drill driver built to help you save time with every hole you drill or screw you drive, including in masonry

**Features:** ATC, LED Light work light, full metal chuck, brushless motor, rubber bumpers and optimized cooling for tough job-site conditions

**Max. Torque:** 65 Nm (soft joint), 85 Nm (hard joint)

**Chuck Clamping Range:** 2 - 13mm



## SIW 8-22 IMPACT WRENCH

Ultimate-class, high-torque cordless impact wrench with 1/2" friction ring anvil for structural bolting and anchoring

**Features:** 2 speed setting, LED light, brushless motor

**Max Torque:** 1000 Nm



## SIW 10-22 IMPACT WRENCH

Ultimate-class, high-torque cordless impact wrench with 3/4" anvil and friction ring for heavy bolting and anchoring

**Features:** 2 speed setting, LED light, brushless motor

**Max Torque:** 1,600 Nm



## BX 4-22 FASTENER TOOL

Battery-powered fastening tool for attaching plasterboard track and other light-duty fastening to concrete, steel and masonry.

**Features:** Fully electric nailer with 30-nail magazine

### SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

### ALL TRADES

Inserts

Concrete Drilling

Fastening, Driving,  
Metal Drilling

Cutting and Grinding

CUTTING  
AND  
GRINDING

All Trades



SERVICES

Distributor

Hilti's Mission

Tool Services

Account Managers  
and Field Engineers

ALL TRADES

Inserts

Concrete Drilling

Fastening, Driving,  
Metal Drilling

Cutting and Grinding



AG 4S-22-125



AG 5D-22-125



AG 6D-22-125



AG 115-8S



AG 115-8D



AG 125-13S



AG 230-20D



AG 230-24D

Disc  
Diameter:

125 mm  
5 inch

125 mm  
5 inch

125 mm  
5 inch

115 mm  
4.5 inch

115 mm  
4.5 inch

125 mm  
5 inch

230 mm  
9 inch

230 mm  
9 inch

Watts



850 W

850 W

1300 W

2000 W

2400 W

Cutting  
Depth:

34m m

34 mm

34 mm

24 mm

24 mm

34 mm

68 mm

68 mm

No load RPM

3400 rpm

9,000 rpm

8,500 rpm

11,500 rpm

6,000 rpm

6,500 rpm

Applications

Metal preparation



Cutting or Grinding



Light concrete finish



Joint renov. / Slitting

Features

ATC

Low Profile

Deadman's Switch

ATC

Deadman's Switch

ATC

AVR

Low Profile

Low Profile

Deadman's Switch

ATC

ATC

Deadman's Switch

ATC

AVR

3-Position Handle

Deadman's Switch

ATC

AVR

3-Position Handle

CIRCULAR SAW - WOOD  
SC 4WL-22

Nuron cordless circular saw



CIRCULAR SAW - METAL  
SC 6ML-22

Nuron cordless circular saw



GRINDER  
DGH 130



SLITTING MACHINE  
DCH 150 SL



