



安平縣富華網類制造有限公司

ANPING FUHUA WIRE MESH MAKING CO.,LTD

ANPING FUHUA WIRE MESH MAKING CO.,LTD

安平縣富華網類制造有限公司

地址：中國河北省衡水市安平縣工業園東區經三路15號
 ADD:NO.15 JINGSAN ROAD, EAST ZONE OF INDUSTRIAL,
 ANPING COUNTY,HENGSHUI,HEBEI,CHINA. P.C:053600
 TEL:0086-318-7868687 7819887
 FAX:0086-318-7521068

E-mail:apfuhua@china.com sales@barbedtapewire.com
 sales@fuhua-wiremesh.com sales@china-razorwire.com
 Website:www.china-razorwire.com,www.fhzz-wiremesh.com
 www.barbedtapewire.com,www.fuhua-wiremesh.com
 中文網址：www.apfuhua.com





RAZOR BARBED WIRE

刀片刺網

Razor wire Specification 刀片刺網規格 -- 刀型 Patent NO.:ZL 02233128.X

| Reference Number 型号 | Blade Style 刀型 | Thickness 刀片厚度 | Wire Dia 芯丝丝径 | Barb Length 刀长 | Barb Width 刀宽 | Barb Spacing 刀间距 |
|------------------------|-------------------|-------------------|------------------|-------------------|------------------|---------------------|
| BTO-10 | | 0.5±0.05 | 2.5±0.1 | 10±1 | 13±1 | 26±1 |
| BTO-12 | | 0.5±0.05 | 2.5±0.1 | 12±1 | 15±1 | 26±1 |
| BTO-18 | | 0.5±0.05 | 2.5±0.1 | 18±1 | 15±1 | 35±1 |
| BTO-22 | | 0.5±0.05 | 2.5±0.1 | 22±1 | 15±1 | 35±1 |
| BTO-28 | | 0.5±0.05 | 2.5±0.1 | 28±1 | 15±1 | 53±1 |
| BTO-30 | | 0.5±0.05 | 2.5±0.1 | 30±1 | 21±1 | 54±1 |
| CBT-60 | | 0.6±0.05 | 2.5±0.1 | 60±2 | 32±1 | 102±1 |
| CBT-65 | | 0.6±0.05 | 2.5±0.1 | 65±2 | 21±1 | 102±1 |

Barbed Tape Wire Specification 刀片刺網規格 -- 外徑和圈數

| Outside Diameter 外徑 | No. of Loops 圈數 | The utmost effective length 有效覆蓋長度 | Type 刀型 | Notes 備注 |
|------------------------|--------------------|---------------------------------------|-----------------------|-------------|
| 450mm | 33 | 7-8M | CBT-60.65 | Single coil |
| 500mm | 56 | 12-13M | CBT-60.65 | Single coil |
| 700mm | 56 | 13-14M | CBT-60.65 | Single coil |
| 960mm | 56 | 14-15M | CBT-60.65 | Single coil |
| 450mm | 56 | 8-9M(3CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 500mm | 56 | 9-10M(3CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 600mm | 56 | 10-11M(3CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 600mm | 56 | 8-10M(5CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 700mm | 56 | 10-12M(5CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 800mm | 56 | 11-13M(5CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 900mm | 56 | 12-14M(5CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 960mm | 56 | 13-15M(5CLIPS) | BTO-10.12.18.22.28.30 | Cross type |
| 980mm | 56 | 14-16M(5CLIPS) | BTO-10.12.18.22.28.30 | Cross type |

The length the diameter of the coil can be designed according to the customers need.
Material:galvanized steel sheet and wire, stainless steel sheet and wire:AISI 430 and AISI 304.
每卷的外徑和長度可以按照客戶要求訂做。
材質：熱鍍鋅鋼板和熱鍍鋅絲，不銹鋼 AISI 430，不銹鋼 AISI 304。

ANPING FUHUA



FH-001 BTO-22 CrossType (交叉式)



FH-002 SAFETY RAZOR FENCE (品字形)



FH-003 CBT-65:Cross type (交叉式)



FH-004 single coil (單圈式) CBT-65



FH-005 PVC Razor Wire (PVC 刀片刺網)



FH-006



FH-007 Common Packing (普通包裝)




FH-008 Carton Packing (紙箱包裝)



FLAT WRAP 平網



FH-009 Flat Wrap 平網

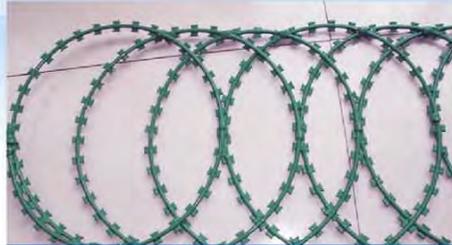

FH-010 PVC Flat Wrap PVC 平網



FH-011 Flat Wrap Installation 平網安裝



FH-012 Flat Wrap Package 平網包裝

RAZOR BARBED MESH (WELDED RAZOR MESH) 籬笆網



FH-014 Type-A (PVC Coated)



FH-015 Type-B



FH-016 Type-C (PVC Coated)



FH-017 Type-A (Galvanized)



FH-018 Type-C (Galvanized)



FH-019 Type-C packing in roll

ANPING FUHUA WIRE MESH

BARBED WIRE 普通刺繩

BARBED WIRE is easy to be installed in many ways. Straight barbed tape wire is installed quickly. It also can save cost and at the same time achieve the effect of frightening and stopping.

Material: high quality low carbon steel wire, stainless steel wire, PVC coated wire.

Surface Treatment: Electro galvanized, Hot dip galvanized, Plastic Sprayed.

Packing: in coil by bulk, carton or pallet according to the customers' requirements

Usage: Barbed wire can be used as the protection net in industry, agriculture, animal husbandry, dwelling house, plantation of fencing, grass boundary, railway, highway and so on.

帶刺鐵絲網很容易以多種方式安裝。可以快速安裝。它也可以節省成本，同時達到嚇停的效果。

材質：優質低碳鋼絲，不銹鋼絲，聚氯乙烯塗層。


表面處理：電鍍鋅，熱鍍鋅，噴塑。

包裝：可根據客戶要求散裝，紙箱或托盤包裝

用途：鐵絲網可用作工業，農業，畜牧業，住宅，籬笆種植，草界，鐵路，公路等的保護網。



FH-020

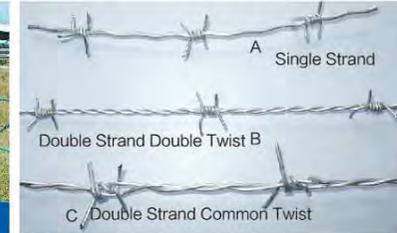

FH-021

Barbed Wire Specification

| Type 類型 | Wire Gauge 絲徑 (SWG) | Barb Distance 刺距 (cm) | Barb Length 刺長 (cm) |
|---|---------------------------------------|--------------------------|------------------------|
| Electric Galvanized Barbed Wire 電鍍鋅刺繩 | 10# x12# | 7.5--15 | 1.5--3 |
| | 12# x12# | | |
| | 12# x14# | | |
| | 12-1/2# x 12-1/2# | | |
| | 12-1/2# x 14# | | |
| | 13# x 13# | | |
| | 13-1/2# x 14# | | |
| Hot-dip Galvanized Barbed Wire 熱鍍鋅刺繩 | 14# x14# | 7.5--15 | 1.5--3 |
| | 14# x16# | | |
| | 15# x15# | | |
| | 15-1/2# x15-1/2# | | |
| PVC coated Barbed Wire; PE Barbed Wire PVC, PE 刺繩 | Before coating | 7.5--15 | 1.5--3 |
| | 1.0mm--3.5mm | | |
| | BWG 11#--20# | | |
| | BWG 8#--17# | | |
| Color | Green, yellow, white, gray and orange | | |

PVC, PE coating thickness: 0.4mm--0.6mm;

Different colors or length are available at customers, request.



MOBILE SECURITY RAZOR BARRIER TRAILER-I 刀片刺網防爆車

- | | |
|--|----------------------------|
| 1) Diameter of coil: 450mm or 900mm | 1) 刀片刺網的卷徑: 450 毫米或 900 毫米 |
| 2) The length of the barricade minimum: 100 meters | 2) 路障的最小距離: 100 米 |
| 3) The width of the barricade: 1.35m | 3) 路障的寬度: 1.35 米 |
| 4) High barricades: 1.8m | 4) 路障的高度: 1.8 米 |
| 5) The distance between clips: 20CM | 5) 相鄰卡扣間距: 20 CM |

MOBILE SECURITY RAZOR BARRIER TRAILER- II 刀片刺網防爆車

- | | |
|--|-----------------------------|
| 1) Diameter of coil: 600mm or 1000mm | 1) 刀片刺網的卷徑: 600 毫米或 1000 毫米 |
| 2) The length of the barricade minimum: 100 meters | 2) 路障的最小距離: 100 米 |
| 3) The width of the barricade: 1.2m | 3) 路障的寬度: 1.2 米 |
| 4) High barricades: 1.6m | 4) 路障的高度: 1.6 米 |
| 5) The distance between clips: 30CM | 5) 相鄰卡扣間距: 30 CM |

MOBILE SECURITY RAZOR BARRIER TRAILER- III 刀片刺網防爆車

- | | |
|--|----------------------------|
| 1) Diameter of coil: 730mm or 980mm | 1) 刀片刺網的卷徑: 730 毫米或 980 毫米 |
| 2) The length of the barricade minimum: 100 meters | 2) 路障的最小距離: 100 米 |
| 3) The width of the barricade: 1.46m | 3) 路障的寬度: 1.46 米 |
| 4) High barricades: 1.71m | 4) 路障的高度: 1.71 米 |
| 5) The distance between clips: 30CM | 5) 相鄰卡扣間距: 30 CM |

Specifications/ 規格

mobile razor wire security barriers BTO-22/ 移動刀片刺網防暴車 BTO-22

1. Material: galvanized steel sheet and wire, or stainless steel sheet and wire/ 材質: 絲和板, 鍍鋅, 或者不銹鋼
2. Usages: Currently, barbed tape has been widely used by many countries in military field, prison and detention houses, government buildings and other national security facilities.

用途: 目前, 刀片刺網防暴車已在軍事領域, 監獄和拘留所, 政府大樓和其他國家安全設施中被許多國家廣泛使用。

MOBILE SECURITY RAZOR BARRIER TRAILER- IV 刀片刺網防爆車

ANPING FUHUA WIRE MESH MAKING



FH-022 Mobile security barriers - I



FH-023



FH-024 Mobile security barriers - III



FH-025 Mobile security barriers - IV Installation



LARGE SIZED WALL SPIKE 大刺釘

MEDIUM SIZED WALL SPIKE 中刺釘

Large sized wall spike Specification 大刺釘的規格

| | Large sized wall spike (A) 大刺釘 - A | Large sized wall spike (B) 大刺釘 - B |
|-------------------------|---|------------------------------------|
| Material / 材質 | hot-dip galvanized steel sheet / 熱鍍鋅鋼板 | |
| Barb length/ 刺長 | 90mm--120mm | 60mm--150mm |
| Barb thickness/ 刺厚 | 2.0mm | |
| Anti rust method/ 抗銹蝕方式 | Hot dip galvanizing or PVC coating/ 熱鍍鋅或者 PVC 塗層 | |
| Standard Color/ 標準顏色 | White, Black, Blackish green, red, etc./ 白色, 黑色, 墨綠色, 紅色等 | |
| Standard Length/ 標準長度 | 1m, 1.25m, 1.5m | 1.0m |
| Packing/ 包裝 | Carton packaging 20 pcs / carton 紙箱包裝 20 根 / 紙箱 | |

The length can be made according to customers' requirements 長度可以按客戶的要求訂做



FH-026 Large wall spike (A) -PVC coated./PVC 大刺釘



FH-027 Large wall spike(A)/ 大刺釘(A)



FH-028 Large wall spike(B)/ 大刺釘(B)



FH-029 Large wall spike (A) -PVC coated./PVC 大刺釘

SMALL SIZED WALL SPIKE 小刺釘

Small sized wall spike Specification 小刺釘的規格

| | | |
|-------------------------|--|--|
| Material / 材質 | Hot-dip galvanized steel sheet; Stainless steel plate/ 熱鍍鋅鋼板, 不銹鋼板 | |
| Barb length/ 刺長 | 60mm | |
| Barb thickness/ 刺厚 | 1.0mm | |
| Anti rust method/ 抗銹蝕方式 | Hot dip galvanizing or PVC coating / 熱鍍鋅或者 PVC 塗層 | |
| Standard Color/ 標準顏色 | White, Black, Blackish green, red, etc./ 白色, 黑色, 墨綠色, 紅色等 | |
| Standard Length/ 標準長度 | 1m, 1.25m, 1.5m | |
| Packing/ 包裝 | Carton packaging 50 pcs / carton 紙箱包裝 50 根 / 紙箱 | |

The length can be made according to customers' requirements/ 長度可以按客戶的要求訂做



FH-030



FH-031 Galvanized



FH-032 Stainless steel



FH-033 PVC medium-sized wall spike (A)/PVC 中刺釘(A)



FH-034 Galvanized Medium sized wall spike (A)/ 鍍鋅中刺釘(A)



FH-035 Installation/ 安裝圖

Medium Sized wall spike Specification 中刺釘的規格

| | Medium-sized wall spike (A) 中刺釘 - A | Medium-sized wall spike (B) 中刺釘 - B |
|-------------------------|---|-------------------------------------|
| Material / 材質 | Hot-dip galvanized steel sheet / 熱鍍鋅板 | |
| Barb length/ 刺長 | 30mm--100mm | 70mm |
| Barb thickness/ 刺厚 | 2.0mm | |
| Anti rust method/ 抗銹蝕方式 | Hot dip galvanizing or PVC coating/ 熱鍍鋅或者 PVC 塗層 | |
| Standard Color/ 標準顏色 | White, Black, Blackish green, red, etc./ 白色, 黑色, 墨綠色, 紅色等 | |
| Standard Length/ 標準長度 | 1m, 1.25m, 1.5m | |
| Packing/ 包裝 | Carton packaging 30 pcs / carton 紙箱包裝 :30 根 / 紙箱 | |

The length can be made according to customers' requirements 長度可以按客戶的要求訂做



FH-036 PVC Medium-sized wall spike (B)/PVC 中刺釘(B)



FH-037 Galvanized Medium-sized wall spike (B)/ 鍍鋅中刺釘(B)



FH-038 Medium-sized wall spike (B) installation/ 中刺釘(B) 安裝圖



FH-039 Wall Spike Packing/ 刺釘包裝



FIBERGLASS WINDOW SCREEN

玻璃纖維窗紗

Fiberglass Window Screen is produced by using glass yarn which is coated first and then woven. It has great capability and advantages of ventilation, sun-shading, antiseptic, innocuity, odourless, washable, stable-shape, longvity of service and smooth-feeling. Therefore it is widely used in all kinds of facilities of ventilation, anti-insects, mosquitoes and flies. Such products have been sold to dozens of countries and areas in the world.

玻璃纖維窗紗，是由玻璃纖維細紗先塗層再編制而成，具有通風，遮陽，防腐，無毒，無味，可洗，形狀穩定，使用壽命長，手感好等特點。因此，它被廣泛用於各種通風，防蟲，蚊子和蒼蠅的設施。這些產品已經銷往世界上幾十個國家和地區。



FH-047




Fiberglass Window Screen Specifications/ 玻璃纖維窗紗規格

| | |
|---|--|
| Diameter 絲徑: | 0.011 inch, 0.013 inch |
| Mesh(Inch)/ 網孔: | 18x16, 18x14, 14x14, 20x20, 18x18, 16x16 |
| Standard Color/ 顏色: | White, Black, Grey, Coffee, etc. |
| Standard Width/ 寬度: | 24'', 30'', 34'', 36'', 42'', 48'', 60'', 72'', 84'', 96'', 108'', 118'' |
| Special size are available according to requirements of customers./ 特殊尺寸可以訂做。 | |

ANPING FUHUA WIRE MESH MAKING




FH-048

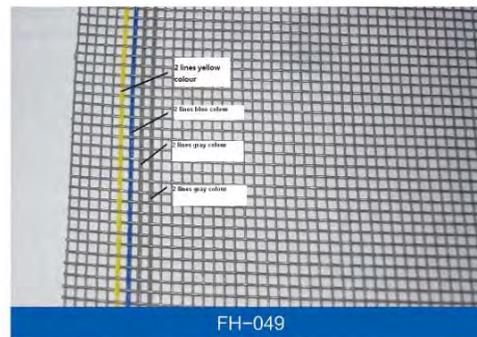

FH-049



FH-050

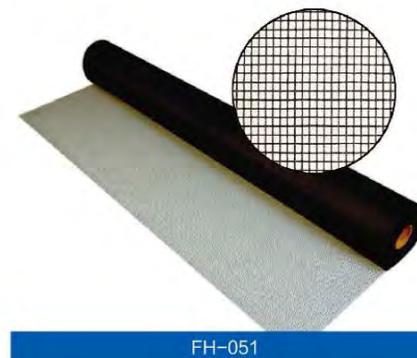

FH-051



FH-052



THE TRIANGLE BENDING FENCE 護欄網

TRIANGLE BEND FENCE / 三角折彎護欄

| | |
|--------------------------|--|
| Height / 高度 | 1.23M, 1.53M, 1.83M, 2.03M, 2.23M, 2.43M |
| Width / 寬度 | 2M、2.5M、2.9M、 |
| Mesh size / 網孔 | 50*100mm 50*150mm 50*200mm 60*200mm |
| Wire diameter / 絲徑 | 3.0-6.0mm |
| Material / 材質 | 低碳鋼絲、不銹鋼絲、鋅鋁合金絲 Low carbon steel wire, stainless steel wire, zinc-aluminum alloy wire |
| Surface treatment / 表面處理 | 電鍍鋅、熱鍍鋅、浸塑、噴塗 Electro-galvanized, hot-dip galvanized, dipping plastic, powder coating |



FH-053


ANPING FUHUA WIRE MESH MAKING



FH-054



FH-055

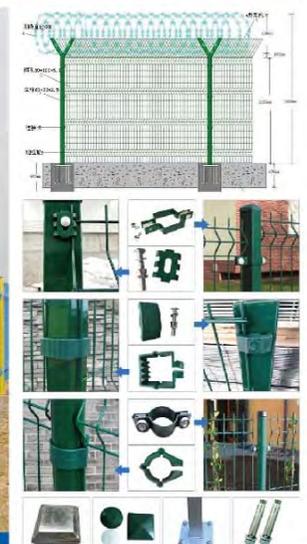



CHAIN LINK FENCE

勾花網

Material : High quality low carbon steel wire , stainless steel wire , PVC wire .

Weaving and characteristic : Flat surface , beautiful , corrosion resisting , long life , weaving simple , beautiful and practical.

Package: Packed on plastic bag and woven bag package at ends, wood pallet, in roll or as customers' requirements.

Usage : Chain Link Mesh is useful extensively in raising chickens, ducks, geese and rabbits ; also used as fences for zoo, playground , gardens , highway , railway , airport , building , residence , etc.

材質：優質低碳鋼絲，不銹鋼絲，聚氯乙烯絲。

編織及特點：表面平整，美觀，耐腐蝕，壽命長，編織簡單，美觀實用。

包裝：包裝在塑料袋和編織袋包裝的兩端，木托盤，成卷或根據客戶要求。

用途：勾花網廣泛用於飼養雞，鴨，鵝和兔子。也用作動物園，游樂場，花園，高速公路，鐵路，機場，建築物，住宅等的圍欄。

Galvanized Chain Link Fence Specification 勾花網規格

| Mesh/ 網孔 | Wire Gauge/ 絲徑 | Width/ 寬度 | Length/ 長度 |
|----------|---------------------|-----------|------------|
| 1-1/2'' | BWG 8,9,10,11,12,13 | 0.5--4M | 5--25M |
| 2'' | BWG 8,9,10,11,12,13 | 0.5--4M | 5--25M |
| 2-1/2'' | BWG 8,9,10,11,12 | 0.5--4M | 5--25M |
| 2-1/4'' | BWG 8,9,10,11,12 | 0.5--4M | 5--25M |
| 2-3/8'' | BWG 8,9,10,11,12 | 0.5--4M | 5--25M |
| 3'' | BWG 8,9,10,12 | 0.5--4M | 5--25M |

Materials and specifications can be made according to customers' requirements.



FH-056



FH-057



FH-058



FH-059



BOTTOM RAIL

TOP RAIL

HINGE

LATCH

TENSION BAND

SIDE RAIL

TENSION BAR



ANTI CLIMBING SECURITY FENCE

密紋網

ANTI CLIMBING SECURITY FENCE / 358 防攀爬安全網 / 密紋網

| | |
|--------------------------|---|
| Height / 高度 | ANTI CLIMBING SECURITY FENCE |
| Width / 寬度 | 2M 2.5M 2.9M 3M |
| Mesh size / 網孔 | 76.2*12.7mm ,75*12mm, 100*12.5mm |
| Wire diameter / 絲徑 | 3.0-6.0mm |
| Material / 材質 | 低碳鋼絲、鍍鋅絲 / Low carbon steel wire, Galvanized wire |
| Surface treatment / 表面處理 | 熱鍍鋅、浸塑、噴塑 / Hot-dip galvanized, dipping plastic, powder coating 防攀爬、抗衝擊、抗剪切特性和良好的震懾作用、使用時間長、堅固耐用。 用于監獄、看守所、警戒綫、軍事基地等高安全領域。 |
| Usage / 用途 | Anti-climbing, impact-resistant, shear-resistant properties and good deterrent, long-lasting, durable. It is used in high security areas such as prisons, detention centers, cordons, and military bases. |



FH-060



FH-061



FH-062

DOUBLE WIRE MESH FENCE

雙夾絲護欄

DOUBLE WIRE MESH FENCE 雙夾絲護欄網

| | |
|--------------------------|---|
| Height / 高度 | 0.63M, 0.83M, 1.03M, 1.23M, 1.43M, 1.63M, 1.83M, 2.03M, 2.23M |
| Width / 寬度 | 2M, 2.5M |
| Mesh size / 網孔 | 50*200mm 60*200mm |
| Wire diameter / 絲徑 | 6/5/6 8/6/8 10/8/10 |
| Material / 材質 | 低碳鋼絲、鍍鋅絲 / Low carbon steel wire, Galvanized wire |
| Surface treatment / 表面處理 | 熱鍍鋅、浸塑、噴塑 / Hot-dip galvanized, dipping plastic, powder coating 抗衝擊能力強、抗老化、耐腐蝕、堅固耐用，美觀大方；用于公路、小區、公園、工廠圍牆、球場、體育場、運動場圍網等。 |
| Usage / 用途 | Strong impact resistance, anti-aging, corrosion resistance, durable and beautiful, Used for highways, residential areas, parks, factory fences, stadiums, sports field fences, etc. |



FH-063



FH-064



FH-065



OTHER FENCE PRODUCTS

其他圍欄用品



FH-064





FH-065

STEEL GRATING

鋼格板



FH-066 Heavy Duty Grating



FH-067 Steel Grating Fence

ANPING FUHUA WIRE MESH

FIELD FENCE

牛欄網 (草原網)

Wire diameter range: mesh wire ----- selvedge wire 1.8--2.0mm, 2.0--2.5mm, 2.2---3.2mm, 2.1---2.8mm, 2.5---2.8mm

Weft aperture: 5cm-60cm

Features: High-strength steel wire braiding, high strength, high tensile force, corrosion resistance, simple structure, convenient maintenance, short construction period, small size and light weight, etc.

絲徑範圍: 網絲 ----- 邊絲 1.8--2.0mm, 2.0--2.5mm, 2.2---3.2mm, 2.1---2.8mm, 2.5---2.8mm

緯孔: 5cm-60cm

特點: 採用高強度鋼絲編結, 强度高、拉力大、耐腐蝕、結構簡單、維護方便、建設周期短、體積小重量輕等。

Field Fence 's specification 牛欄網規格

| Number of wires / 根數 | Height, CM / 高度 CM | Mesh / 網孔 (徑孔) |
|----------------------|--------------------|---|
| 14 | 197.4 | 9+9+9+10.2+11.4+12.7+14+15.3+17.8+20.3+22.9+22.9+22.9 |
| 12 | 165.5 | 9+9+10.2+11.4+12.7+14+15.3+17.8+20.3+22.9+22.9 |
| 11 | 156.5 | 9+10.2+11.4+12.7+14+15.3+17.8+20.3+22.9+22.9 |
| 10 | 147.5 | 10.2+11.4+12.7+14+15.3+17.8+20.3+22.9+22.9 |
| 11 | 142.6 | 9+9+10.2+11.4+12.7+14+15.3+17.8+20.3+22.9 |
| 9 | 137.3 | 11.4+12.7+14+15.3+17.8+20.3+22.9+22.9 |
| 10 | 133.6 | 9+10.2+11.4+12.7+14+15.3+17.8+20.3+22.9 |
| 8 | 125.9 | 12.7+14+15.3+17.8+20.3+22.9+22.9+22.9 |
| 9 | 124.6 | 10.2+11.4+12.7+14+15.3+17.8+20.3+22.9 |
| 10 | 119.7 | 9+9+10.2+11.4+12.7+14+15.3+17.8+20.3 |
| 8 | 114.4 | 11.4+12.7+14+15.3+17.8+20.3+22.9 |
| 7 | 113.2 | 14+15.3+17.8+20.3+22.9+22.9 |
| 9 | 110.7 | 9+10.2+11.4+12.7+14+15.3+17.8+20.3 |
| 7 | 103 | 12.7+14+15.3+17.8+20.3+22.9 |
| 8 | 101.7 | 10.2+11.4+12.7+14+15.3+17.8+20.3 |
| 9 | 99.4 | 9+9+10.2+11.4+12.7+14+15.3+17.8 |
| 6 | 99.2 | 15.3+17.8+20.3+22.9+22.9+22.9 |
| 7 | 91.3 | 11.4+12.7+14+15.3+17.8+20.3 |
| 8 | 90.4 | 9+10.2+11.4+12.7+14+15.3+17.8 |
| 6 | 90.3 | 14+15.3+17.8+20.3+22.9 |
| 5 | 83.9 | 17.8+20.3+22.9+22.9 |
| 8 | 81.6 | 9+9+10.2+11.4+12.7+14+15.3 |
| 7 | 81.4 | 10.2+11.4+12.7+14+15.3+17.8 |
| 6 | 80.1 | 12.7+14+15.3+17.8+20.3 |



FH-068



FH-069



WELDED WIRE MESH

電焊網



FH-070 Galvanized Welded Wire Mesh Panel / 鍍鋅電焊網片

Specification List Of Welded Mesh Panel 電焊網片規格表

| Mesh size/ 網孔 | Wire Dia./ 絲徑 | Common width 寬度 | Common length 長度 |
|---------------|----------------|--------------------|---------------------|
| 25mm | 2.0mm---6.0mm | 0.2---2.5m | 0.2---4m |
| 40mm | 2.0mm---8.0mm | | |
| 50mm | 2.5mm---12.0mm | | |
| 80mm | 2.5mm---14.0mm | | |
| 100mm | 3.0mm---16.0mm | | |
| 1" | 0.6mm---6.0mm | 0.2---2.5m | 0.2---10m |
| 1.5" | 1.0mm---8.0mm | | |
| 2" | 1.0mm---12.0mm | | |
| 3" | 1.0mm---14.0mm | | |
| 4" | 1.5mm---16.0mm | | |

Different models are available as customers' request



FH-071 Galvanized Welded Wire Mesh / 鍍鋅電焊網



FH-072 PVC Welded Wire Mesh / PVC 電焊網

HEXAGONAL WIRE NETTING

六角網

Material : Galvanized iron wire , stainless steel wire , PVC coated wire .
Weaving: Normal twist , Reverse twist , Bidirectional twist .
Characteristics: Firm structure , flat surface , corrosion-resisting and oxidation-resisting .

APPLICATION: Hexagonal wire netting with its good corrosion resistance and oxidation resistance , serves well as strengthening , protection and temperature keeping material in the form of mesh container , stone cage , isolation wall , boiler cover or poultry fence in construction , chemical , breeding , garden and food processing industries .

材質：鍍鋅鐵絲，不銹鋼絲，聚氯乙烯塗層絲。

編織：正擰，反向擰，雙向擰。

特性：結構堅固，表面平坦，耐腐蝕和抗氧化。

應用：具有良好的耐腐蝕性和抗氧化性的六角網，可作為網狀容器，石籠，隔離牆，鍋爐蓋或家禽圍欄，保護和保溫材料，可用於建築，化工，養殖，花園和食品加工業。




FH-073



FH-074 PVC Coated



FH-075 Chicken mesh / 養雞網

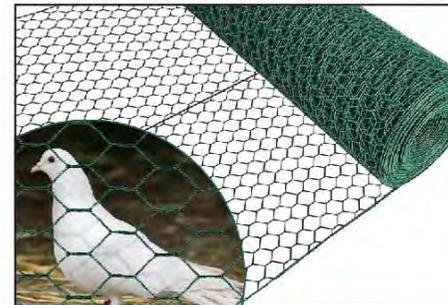

FH-076 Pigeon mesh / 鴿網



FH-077 Pet net / 寵物網



WEAVE GABION BOX

編織石籠網

Specification: 2x1x1M 3x1x1M .4x1x1M 2x1x0.5M 3x1x0.5M .4x1x0.5M
 Mesh Size: 60x80mm 80x100mm 90x110mm 80x120mm 100x120mm 120x150mm
 Wire Dia: Selvedge Wire, Mesh Wire, Binding Wire

1. mesh wire is about 2.0- 4.0 MM
 2. Selvedge wire generally larger than mesh wire, 0.5-1.0mm thicker than mesh wire
 3. Binding wire is generally smaller than the mesh wire, and the common 2.0mm is mostly
- Wire's tensile strength: Not less than 38kg/ m², 380N/ m²
 Material: Low carbon steel wire, PVC coated wire, Zn-Al alloy wire.
 Surface treatment:
1. Hot -dip galvanizing, The zinc can reach 275 g/ m², with strong corrosion resistance.
 2. Galvan wire zinc -aluminum alloy wire, this kind of wire is divided into two types, aluminium 5%, aluminium 10%, super anti-corrosion.

3. PVC plastic coating, coating thickness 1.0mm strong anti -corrosion.
 Diaphragm: Add a diaphragm every 1M in the long direction of the gabion box.
 Size: Can be customized according to standard.

規格: 2x1x1M 3x1x1M .4x1x1M 2x1x0.5M 3x1x0.5M .4x1x0.5M
 網孔: 60x80mm 80x100mm 90x110mm 80x120mm 100x120mm 120x150mm
 絲徑: 分為三種, 邊絲、網絲、綁絲

1. 網絲範圍在 2.0-4.0mm 之間
 2. 邊絲: 一般大于網絲, 比網絲粗 0.5-1.0mm
 3. 綁絲: 綁絲一般小于網絲, 常見的 2.0mm 居多
- 鋼絲拉力: 不小于 38kg/ m², 380N/ m²
 材質: 低碳鋼絲、PVC 包塑絲、鋅鋁合金絲
 表面處理:

1. 熱鍍鋅(上鋅量可達到 275 克 / m²), 防腐性強。
2. 高爾凡絲(鋅鋁合金絲)這種絲分為兩種, 鋅 5%, 鋁 10%, 防腐性超強。
3. PVC 包塑, 包塑厚度 1.0mm, 防腐性強。

隔斷: 在石籠網的長的方向每 1M 加上一個隔斷。
 尺寸: 可根據標準定做。



FH-078



FH-079



FH-080 Gabion box



FH-081

EXPANDED METAL MESH

鋼板網



FH-082



FH-083



FH-084



FH-085



FH-086

Expanded Metal Mesh Specifications

| | |
|-------------------------|---|
| Product name/ 產品名 | Expanded metal mesh/ 鋼板網 |
| Material/ 材質 | low carbon Galvanized steel plate / 低碳鍍鋅鋼板 Aluminum steel panel / 鋁板 |
| Hole shape/ 孔的形狀 | stainless steel panel and other metal. / 不銹鋼板或者其他金屬板 Diamond, round hole, square hole, hexagonal hole. etc./ 菱形孔, 圓孔, 方孔, 六角形孔 |
| Hole size/ 孔尺寸 | 1/2(15*30mm) 3/16(8*16mm) 3/20(3*6mm) (5*10mm) |
| Surface treatment/ 表面處理 | Galvanized or Powder coated/ 鍍鋅, PVC 塗層 |
| Application/ 應用 | .Fence, panels & grids; Walkways; .Protections & barriers; Industrial & fire stairs; .Metallic walls; .Metallic ceilings; .Grating & platforms; .Metallic furniture; .Balustrades; .Containers & fixtures; .Facade screening; .Concrete stoppers 柵欄, 面板和網格; 人行道; 防護和柵欄; 工業和防火梯; 金屬牆; 金屬天花板; 柵欄和平臺; 金屬家具; 欄杆; 容器和固定裝置; 門面篩網; 混凝土壩子。 |